


Efficient Optical Lighting Driverless LED Lighting



MODEL-618

Product Dimension

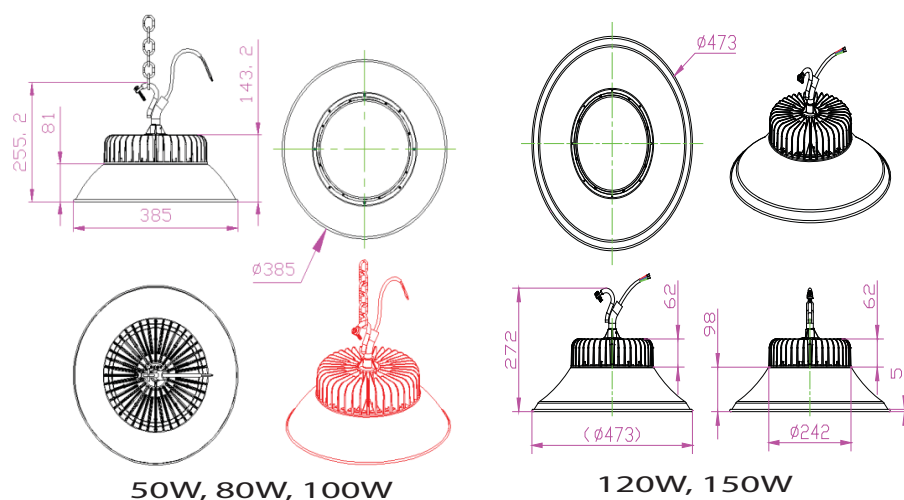

Technical Specification

Performance

Wattage Power Con. (W)

Voltage (VAC) 50Hz/60Hz

Driver

Power Factor

Color Temperature

Option Available

CRI

Beam Angle

Luminous Efficacy

Option Available

Light Output Ratio (LOR)

IP Rating

Operating Temperature

LifeSpan

Parameter

30W, 50W,

100W, 150W

AC 128~242V

Driverless System

≥0.98

5700K~6500K

3000K/4000K

≥80

60°/120°

85LM/W

95~100LM/W

≥90%


IP65

-40~45° C

30000 hrs @Ta 32°C

Product Series	Model 618-50	Model 618-80	Model 618-100	Model 618-120	Model 618-150
Inner Packing Dimension (Cm)	27.0 x 27.0 x 24 Unit : 1	27.0 x 27.0 x 24 Unit : 1	27.0 x 27.0 x 24 Unit : 1	27.0 x 27.0 x 24 Unit : 1	27.0 x 27.0 x 24 Unit : 1
Gross Weight Box (Kg)	3.84	3.84	3.84	3.84	3.84
Outer Packing Dimension (Cm)	56 x 28 x 51 Unit : 4	56 x 28 x 51 Unit : 4	56 x 28 x 51 Unit : 4	56 x 28 x 51 Unit : 4	56 x 28 x 51 Unit : 4
Packing Dimension (Cm)	53 x 20 x 53 Unit : 12	53 x 20 x 53 Unit : 12	53 x 20 x 53 Unit : 12	53 x 20 x 53 Unit : 12	53 x 20 x 53 Unit : 12

Light Distribution Curve

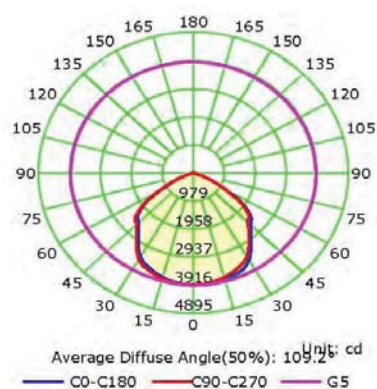

Remark: Specification Subject to Change Without Piror Notice.