



MODEL-0104

STREET LIGHTS SERIES

Product Dimensions

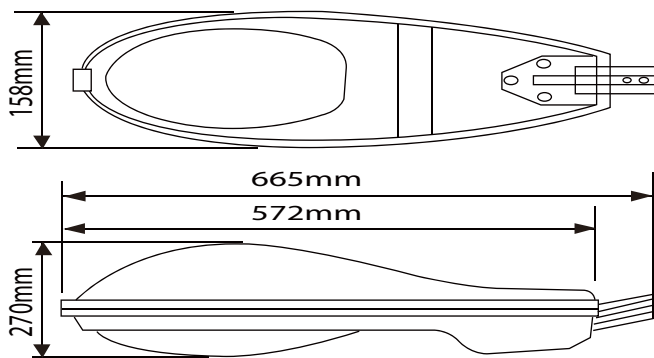

Light Distribution Curve

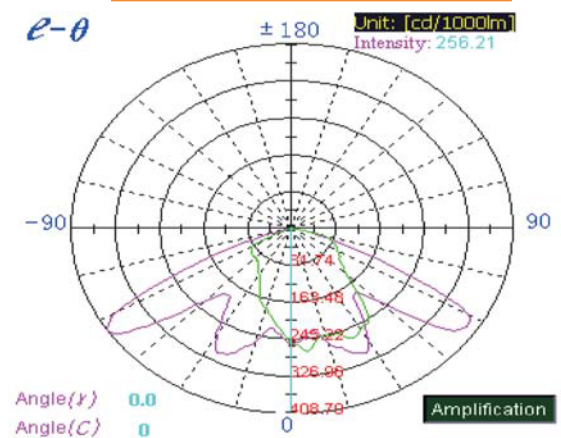

Material Features

- ▶ Die Casting Aluminium
- ▶ Oval Optical Reflector with Hi-Efficiency Energy Saving Lighting System, reflecting rate with Optics Design is up to 96%. Tempered glass lens. IP66. Anti-electric shock is Class I. Corrosion -resistance Class II
- ▶ Single lamp 35W-250W HPS, CDM.
- ▶ Control Gear : Electronic/Conventional Ballast

Technical Specification

Performance

Performance	Parameter
Input Power	35W~250W HPS/CDM
Color Temperature	2000/3000/4200K
CRI	85~95
Luminous Efficiency	100~120 Lm/W
Input Voltage	120~277V, 50/60Hz
IP Rate	IP66
Light Output Ratio (LOR)	≥87
Power Factor (PF)	≥0.98
Initial Luminaire Efficiency (lm/W)	≥87
Reflector Reflectance Rate	≥96%