



HIGHBAY LIGHTS SERIES



Light Distribution Curve

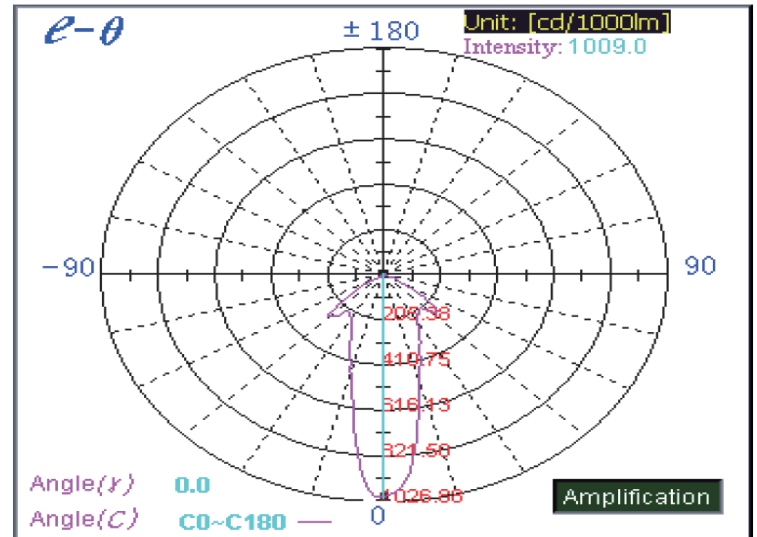

Product Dimensions

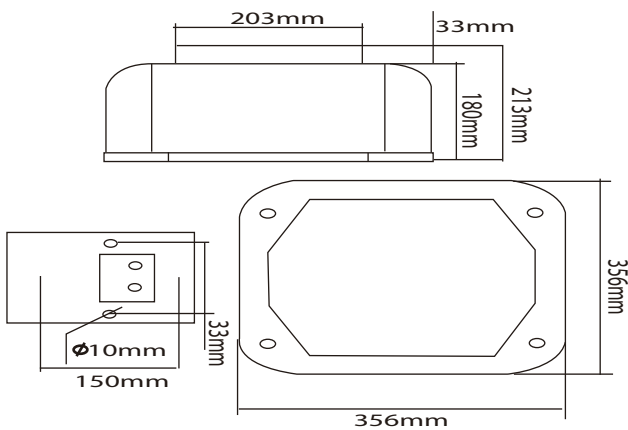

Technical Specification

Performance

Performance	Parameter
Input Power	35W~250W CDM
Color Temperature	3000/4200K
CRI	85~95
Luminous Efficiency	100~120 lm/W
Input Voltage	120~277V, 50/60Hz
IP Rate	IP65
Light Output Ratio (LOR)	≥87
Power Factor (PF)	≥0.98
Initial Luminaire Efficiency (lm/W)	≥87
Reflector Reflectance Rate	≥96%

Material Features

- ▶ Die Casting Aluminium
- ▶ Round or Oval Optical Reflector with Hi-Efficiency Energy Saving Lighting System, reflecting rate with Optics Design is up to 96%. Tempered glass lens.
- ▶ IP65. Anti-electric shock is Class I. Corrosion -resistance Class II
- ▶ Single lamp 35W-250W, CDM.
- ▶ Control Gear: Electronic/Conventional Ballast